
**SL182912-B-XL-C3**

Cylindrical roller bearing

Cylindrical roller bearing SL18, full complement roller set, single row, semi-locating bearing, 1 rib on outer ring, 2 ribs on inner ring, type SL18

X-life

Technical information





Your current product variant

| | | |
|--------------------------------|--------------|-----------------------------------|
| Design | B | Internal Variant B |
| Radial internal clearance | C3 (Group 3) | Internal clearance larger than CN |
| Tolerance class | PN | Normal (PN) |
| Number of rolling element rows | 1 | Single-row design |

Main Dimensions & Performance Data

| | | |
|----------|-------------|-----------------------------------|
| d | 60 mm | Bore diameter |
| D | 85 mm | Outside diameter |
| B | 16 mm | Width |
| C_r | 63,000 N | Basic dynamic load rating, radial |
| C_{0r} | 76,000 N | Basic static load rating, radial |
| C_{ur} | 13,900 N | Fatigue load limit, radial |
| n_G | 5,400 1/min | Limiting speed |
| n_{gr} | 2,900 1/min | Reference speed |
| m | 276.5 g | Weight |

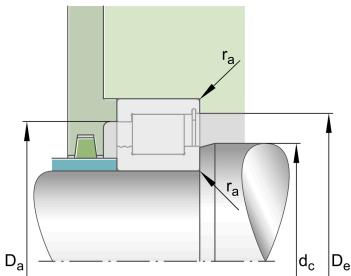



Mounting dimensions

| | | |
|--------------|---------|--------------------------------------|
| $d_{a \min}$ | 69 mm | Minimum diameter shaft shoulder |
| $d_{c \min}$ | 69 mm | Minimum shaft shoulder |
| $D_{a \max}$ | 74 mm | Maximum diameter of housing shoulder |
| $D_{e \min}$ | 78.5 mm | Minimum diameter of housing shoulder |
| $r_{a \max}$ | 1 mm | Maximum recess radius |
| E | 78.6 mm | Raceway diameter outer ring |






Dimensions

| | | |
|------------|---------|---------------------------------|
| r_{\min} | 1 mm | Minimum chamfer dimension |
| s | 1 mm | Axial displacement |
| d_1 | 69 mm | Maximum rib diameter inner ring |
| $D_1 \min$ | 74.4 mm | Minimum rib diameter outer ring |

Temperature range

| | | |
|------------|--------|----------------------------|
| T_{\min} | -30 °C | Operating temperature min. |
| T_{\max} | 120 °C | Operating temperature max. |

Characteristics

-  Radial load
-  Axial load in one direction
-  Grease Lubrication
-  Oil Lubrication
-  Not sealed