



Dimensions of grooves

to DIN 2211

Abmessungen der Rillen


nach DIN 2211

Dimensions des gorges

aux normes DIN 2211

Dimensiones de los canales

según normas DIN 2211

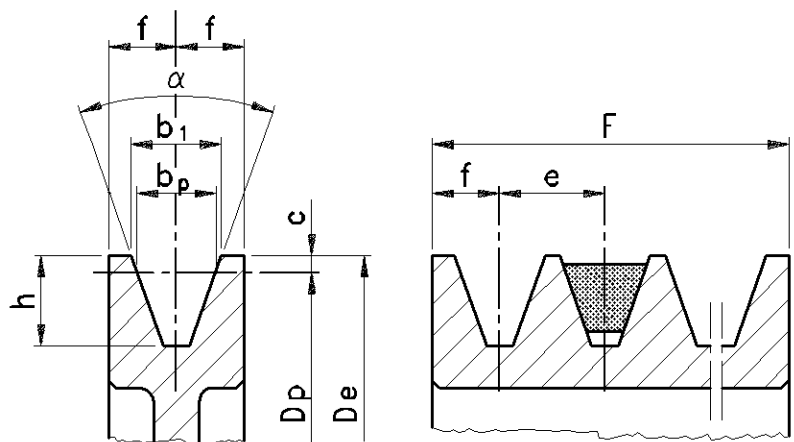

SECTION / PROFIL / SECTION / SECCIÓN		SPZ	SPA	SPB	C
b_p		8,5	11	14	19
$b_1 \approx$		9,7	12,7	16,3	22
c		2	2,8	3,5	4,8
e		$12 \pm 0,3$	$15 \pm 0,3$	$19 \pm 0,4$	$25,5 \pm 0,5$
f		$8 \pm 0,6$	$10 \pm 0,6$	$12,5 \pm 0,8$	17 ± 1
h		11	14	18	22
α $\frac{34^\circ}{38^\circ}$ for / für / pour / para D_p Tolerances / Toleranzen / Tolérances / Tolerancias		≤ 80	≤ 118	≤ 190	≤ 315
		> 80	> 118	> 190	> 315
		$\pm 1^\circ$	$\pm 1^\circ$	$\pm 1^\circ$	$\pm 30'$
Face width Fmin by nr. of grooves Bandbreite Fmin mal Anzahl der Rillen Largeur bande Fmin par no. des gorges Cara polea Fmin para no. de canales $F_{min} = (\text{Nr. of grooves} - 1) \cdot e + 2 f$ $F_{min} = (\text{Anzahl der Rillen} - 1) \cdot e + 2 f$ $F_{min} = (\text{No. des gorges} - 1) \cdot e + 2 f$ $F_{min} = (\text{No. de canales} - 1) \cdot e + 2 f$	1	16	20	25	34,0
	2	28	35	44	59,5
	3	40	50	63	85,0
	4	52	65	82	110,5
	5	64	80	101	136,0
	6	76	95	120	161,5
	7	88	110	139	187,0
	8	100	125	158	212,5
	9	112	140	177	238,0
	10	124	155	196	263,5
	11	136	170	215	289,0
	12	148	185	234	314,5
Tolerances of: (Nr. of grooves - 1) · e Tolérances de: (No. des gorges - 1) · e		Toleranzen von: (Anzahl der Rillen - 1) · e Tolerancias de: (No. de canales - 1) · e		$\pm 0,6$	$\pm 0,6$
				$\pm 0,8$	$\pm 1,0$